

C115/C115T

Surface-mount loudspeaker

features

- ▶ 5" (125mm) ICT™ transducer
- ▶ Weather resistant enclosure and transducer
- ▶ Versatile mounting arrangement

applications

- ▶ Retail outlets
- ▶ Hotels, bars and restaurants
- ▶ Health clubs
- ▶ Theme parks

The elegant surface-mount C115 loudspeaker is ideal for reproducing both speech and background music in a distributed sound system. Its unobtrusive, lightweight polypropylene injection-moulded enclosure withstands most weather conditions and protects the weather-resistant drive unit in exposed locations.




architectural

technical specifications

TYPE	Ultra-compact, two-way ICT™
FREQUENCY	80Hz-20kHz
RESPONSE (1)	120Hz-20kHz ± 3dB
DRIVERS	5" (125mm) full-range ICT™
RATED POWER (2)	50W AES, 200W peak
RECOMMENDED AMPLIFIER	50-200W into 4 ohms
SENSITIVITY (3)	88dB
MAXIMUM SPL (4)	105dB continuous, 111dB peak
NOMINAL IMPEDANCE	8 ohms
DISPERSION (-6dB)	90° conical
CROSSOVER	-
ENCLOSURE	Mineral loaded polypropylene
FINISH	Light grey or graphite
PROTECTIVE GRILLE	Perforated steel
CONNECTORS	Binding posts
OPTIONS	30W line transformer Shielded magnet
DIMENSIONS	(W) 194mm x (H) 217mm x (D) 135mm (W) 7.6ins x (H) 8.5ins x (D) 5.3ins
WEIGHT	1.7kg (3.7lbs)

overall dimensions

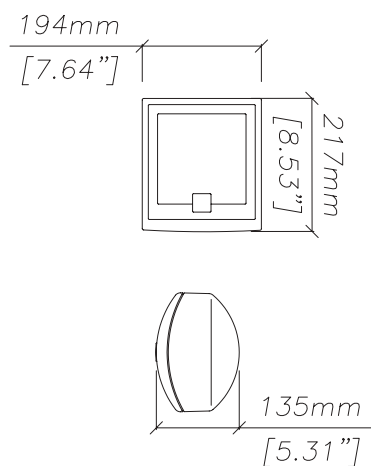

C115/C115T

Century Point, Halifax Road, Cressex Business Park,
High Wycombe, Buckinghamshire HP12 3SL, England.
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669
E-mail: info@martin-audio.com
All information is Copyright © 2003 Martin Audio Ltd.



www.martin-audio.com